BUEHLER® Replicating Media

- Premium Quality, Exact
 Surface Replicas With
 ≤ 1µm Resolution of
 Surface Detail
- Creates a Permanent Record for Future Examination and Comparisons
- Simple to Use, Fast Setting, and Simple to Remove
- Available in Standard and Thixotropic Grades
- Very Low Chlorine and Sulfur Contents
 - Suitable for Nuclear Use
- All Grades are Free From Solvents and are Non-flammable







Ordering Information

57-6000 Manual Applicator for Replicating Media

57-6001 Static Mixers 10 Pack

57-6002 Replicating Media 1/7. 1 minute working time, 7 minute cure time.

57-6003 Replicating Media 7/30T. 7 minute working time, 30 minute cure time. Thixotropic formula for use on horizontal surfaces.

Replicating Media Instructions

Fit the cartridge to the applicator and remove the cap (or the static mixer in the case of a part-used cartridge). Apply very light pressure via the applicator trigger to ensure that both cartridge nozzles are free but without expelling either of the two components. Only light trigger pressure is necessary to expel the Replicating Media via the static mixer. Heavy trigger pressure indicates that there is a blockage in the nozzles; any blockage must be removed, as further pressure can lead to seepage via the piston seals at the rear of the cartridges. Pressure can be relieved from the plunger by pressing the knurled lever under the back of the applicator 'upwards'. Lock static mixer into place.


Dispense a small amount (i.e. a 1"-2" (25-50mm) 'string') of Replicating Media onto a surface remote from the area of interest. This ensures that only correctly blended Replicating Media is applied to the area of interest. Remove any dirt or debris from area of interest. Using a weave pattern, apply the replicating medium to the clean subject surface (at the same time ensuring that each new thread of Replicating Media actually flows into the previous thread) until the area of interest is covered.

Allow the Replicating Media to cure. Cure times will be shorter at temperatures higher than 77 °F (25°C) and longer below 77 °F (25°C). Strong resistance to pressure means media is cured.

The static mixer should be left in place on a part-used cartridge of Replicating Media so that an effective seal is achieved, thus enabling the cartridge to be re-used.

Additional information:

- · Replicating Media is a two part elastomeric compound
- Combines good mechanical properties such as high tensile strength, tear resistance, and elongation resistance
- When used with normal precautions, poses no significant health risks
- Can be sputter coated for SEM applications.

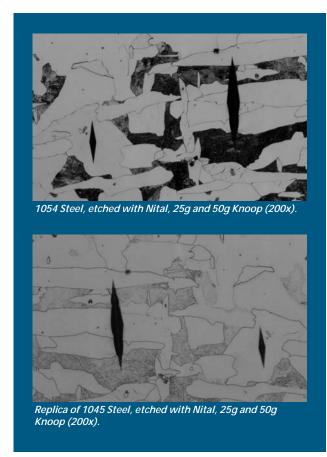

For a complete listing of consumables, please refer to our Consumables Buyer's Guide. Buehler continuously makes product improvements; therefore, technical specifications are subject to change without notice.

© 2004 BUFHLER LTD. Printed in U.S.A. 25M0504 EN01249

*For metallurgical equipment produced by BUEHLER LTD. USA

BUEHLER GMBH

In der Steele 2 • 40599 Düsseldorf Postfach 16 03 55 • 40566 Düsseldorf Telefon: (+49) 0211/974100 • Telefax: (+49) 0211/9741079 Web Site: http://www.buehler-met.de Email: info@buehler-met.de

BUEHLER SARL

Miniparc de Dardilly, Bát. 0 3, Chemin du Jubin • 69570 Dardilly-France Téléphone: (+33) (04) 37 59 81 20 Télécopie: (+33) (04) 37 59 81 29 Web Site: http://www.buehler.fr Email: info@buehler.fr

BUEHLER UK

101, Lockhurst Lane . Coventry . CV6 5SF Telephone: (+44) (0) 24 7658 2158 • Fax: (+44) (0) 24 7658 2159 Web Site: http://www.buehler.co.uk Email: sales@buehler.co.uk

BUEHLER CANADA

9999 Highway 48 Markham, Ontario L3P 3J3 Telephone: (905) 201-4686 • Fax: (905) 201-4683 Sales Telephone: 1-800-268-3593 Email: info@buehler.ca

BUEHLER ANALYST

SECTION

BUEHLER ASIA

5/F Vogue Centre 696 Castle Peak Road Lai Chi Kok, Kowloon Hong Kong, SAR, China Telephone: (852) 2307 0909 Fax: (852) 2307 0233



BUEHLER LTD. - Worldwide Headquarters 41 Waukegan Road • P.O. Box 1 Lake Bluff, Illinois 60044-1699 USA Tel: 847/295-6500 • Fax: 847/295-7979 Sales: 1/800/BUEHLER • 1/800/283-4537 Web Site: http://www.buehler.com Email: info@buehler.com